
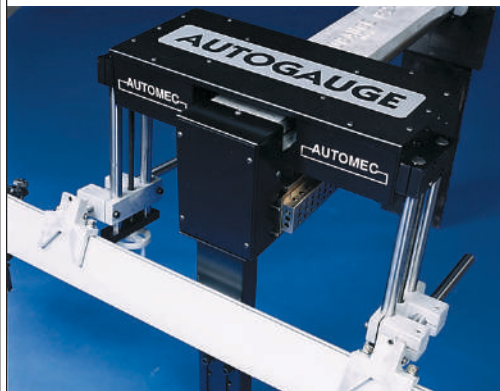


# AUTOGAUGE MB for SMALL to MEDIUM APPLICATIONS

## MINIBRUTE

Offers quick set-up and sequential backgauge positioning for brakes with 3' to 8'6" between the side frames, utilizing up to a 66" gauge bar. It is designed for workpieces where 20" of front to rear positioning is satisfactory and one operator handles the workpiece. MINIBRUTE is available as a single axis backgauge or a 2-axis with ram control. Consult price sheet for compatible control options.

Video and mounting templates are provided for simple self-installation of single axis systems.

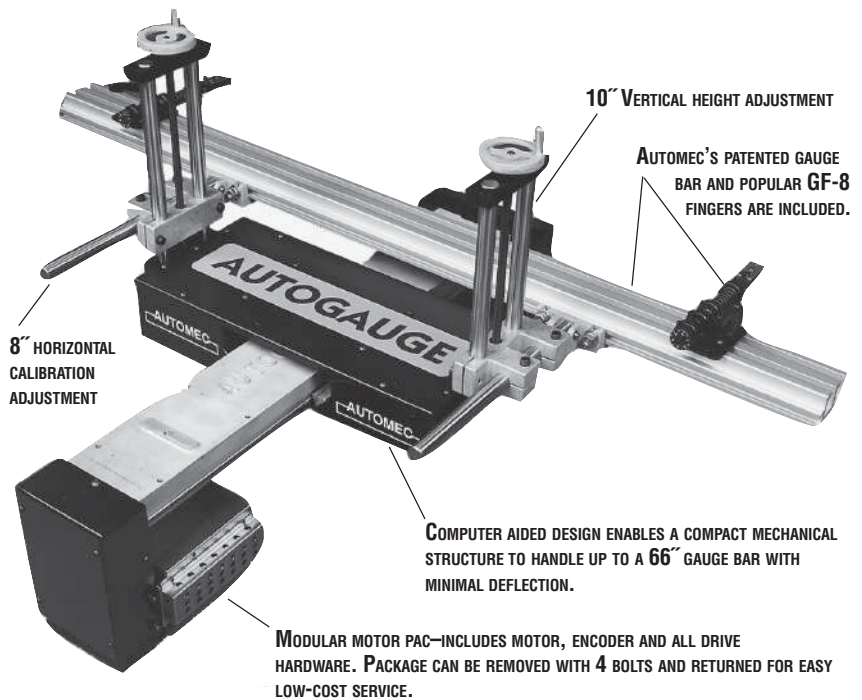

Unique fold-down feature allows the uprights and gauge bar to be swung out of the way for forming flanges exceeding 20". A rear support leg is also provided for increased rigidity.



82 CALVARY STREET  
WALTHAM, MA 02453-5918

## TECHNICAL SPECIFICATIONS

Recommended press brake width (Between side frames)	3' to 8'6"	Workblocks supplied	2
Tilting gauge bar	std.	GF-8 flip fingers supplied	2
Fold-down gauge bar	std.	Horizontal calibration adjustment	8"
No. of drive screws	1	Holding force	200 lbs.
Gauge height adj.	10"	Std. gaugebar length	66"
Gauge travel	20"	O.A. Width (less gaugebar)	31"
Gauge speed	600"/minute	O.A. Height	21"
Resolution	.001"	O.A. Depth (front to rear)	41"
Repeatability	±.002"	Rear support leg	std.
		Shipping weight	260 lbs.

Input power – 115 VAC ±10% 50/60 HZ, 7A MAX


Telephone: 781-893-3403 • Fax: 781-899-5708

E-mail: sales@automec.com

**WEBSITE: WWW.AUTOMECH.COM**

# AUTOGAUGE MB

**MINI BRUTE - SMALL BUT TOUGH**

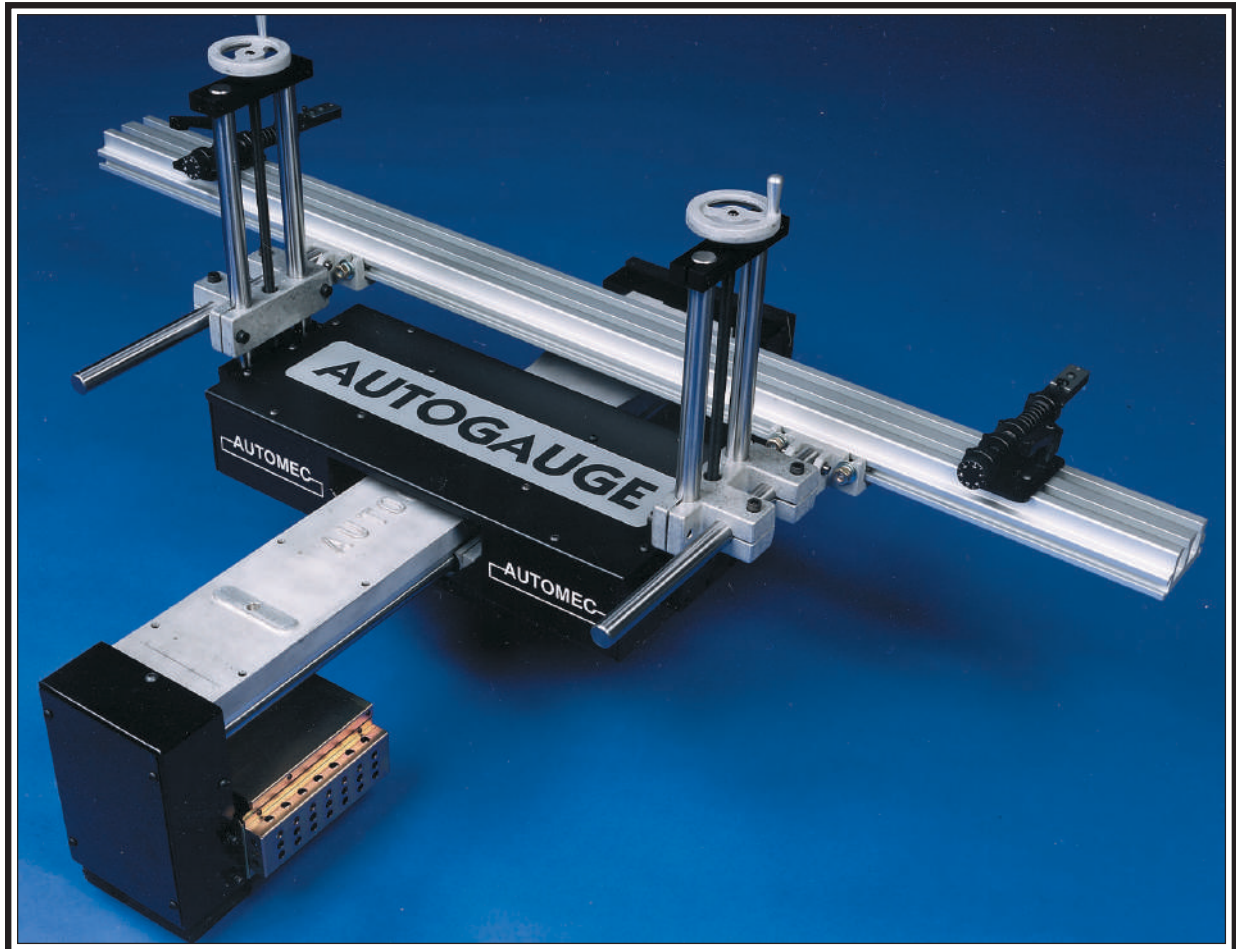

*Designed to fit on pressbrakes with up to 6' 6" between the side frames, the MINI BRUTE offers a compact, rugged solution to pressbrake gauging, where a single operator handles the workpiece. The DC motor driven gauge has 20" of travel and comes with a 66" gauge bar.*

(See reverse side for specifications)



AUTOMECH, INC. 82 Calvary Street, Waltham, MA 02453-5918

Telephone: 781-893-3403 • Fax: 781-899-5708 • E-mail: sales@automech.com • Website: www.automech.com