



## Product Features

- Less indentation, Intermediate frequency (1000Hz) DC output
- Self-contained workbench, only need to put the workpiece on the platform
- Self-contained workbench, only need to put the workpiece on the platform
- Easy to set up, just enter material and thickness




### Main Features

- Easy Setting, By entering the "material " and "thickness".

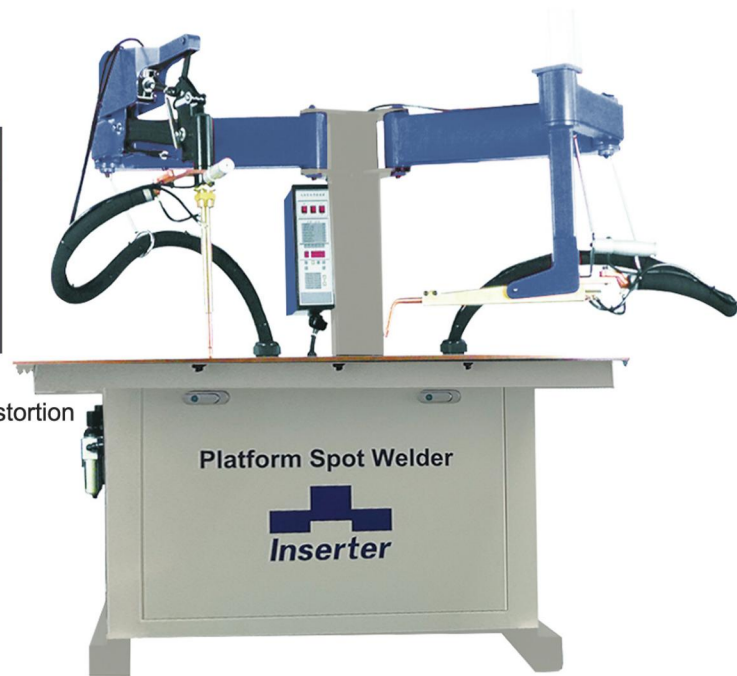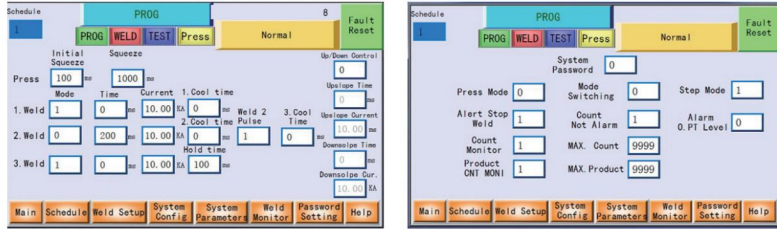

- Weldable Nuts
- Clean and Strong, No burn, no distortion

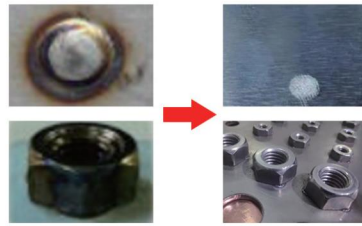

### Technical Parameter

Model	DB-130W		DB-130W(HV)
Power Supply	Rated Capacity	130KVA	130KVA
	Input Power	3PH 380V 50/60HZ	3PH 380V 50/60HZ
Maximum Short-circuit Current	20000A		22000A
Duty Cycle Rate	20%		50%
Welding Head Type	Horizontalz		Horizontal,Vertical
Cooling Water	Water Flow	8L/min	16L/min
	Water Temperature	≤30°	≤30°
Electrode Pressure	2000N		2000N
Air Pressure	0.5-0.6Mpa		0.5-0.6Mpa
Platform Size	1200*800mm		1200*800mm
Standard Welding Thickness	Mild Steel	3.0+3.0mm	3.0+3.0mm
	Stainless Steel	2.5+2.5mm	3.0+3.0mm
	Aluminum Plate	2.0+2.0mm	2.0+2.0mm
	Galvanized sheet	2.5+2.5mm	2.5+2.5mm
Note:Table material, size, lift can be customized according to customer needs			



Dongguan Insertion Machinery Co.,Ltd.

Address: No.80 Yunhexiyi Road,Dongcheng Street,Dongguan City,Guangdong China.

WhatsApp&Phone:+86-139-1756-4315

market@insertionmachine.com

Tel:+86-512-50339036

www.insertionmachine.com

